


DWG No. 2K992501DV0

Version	Revise content	Check

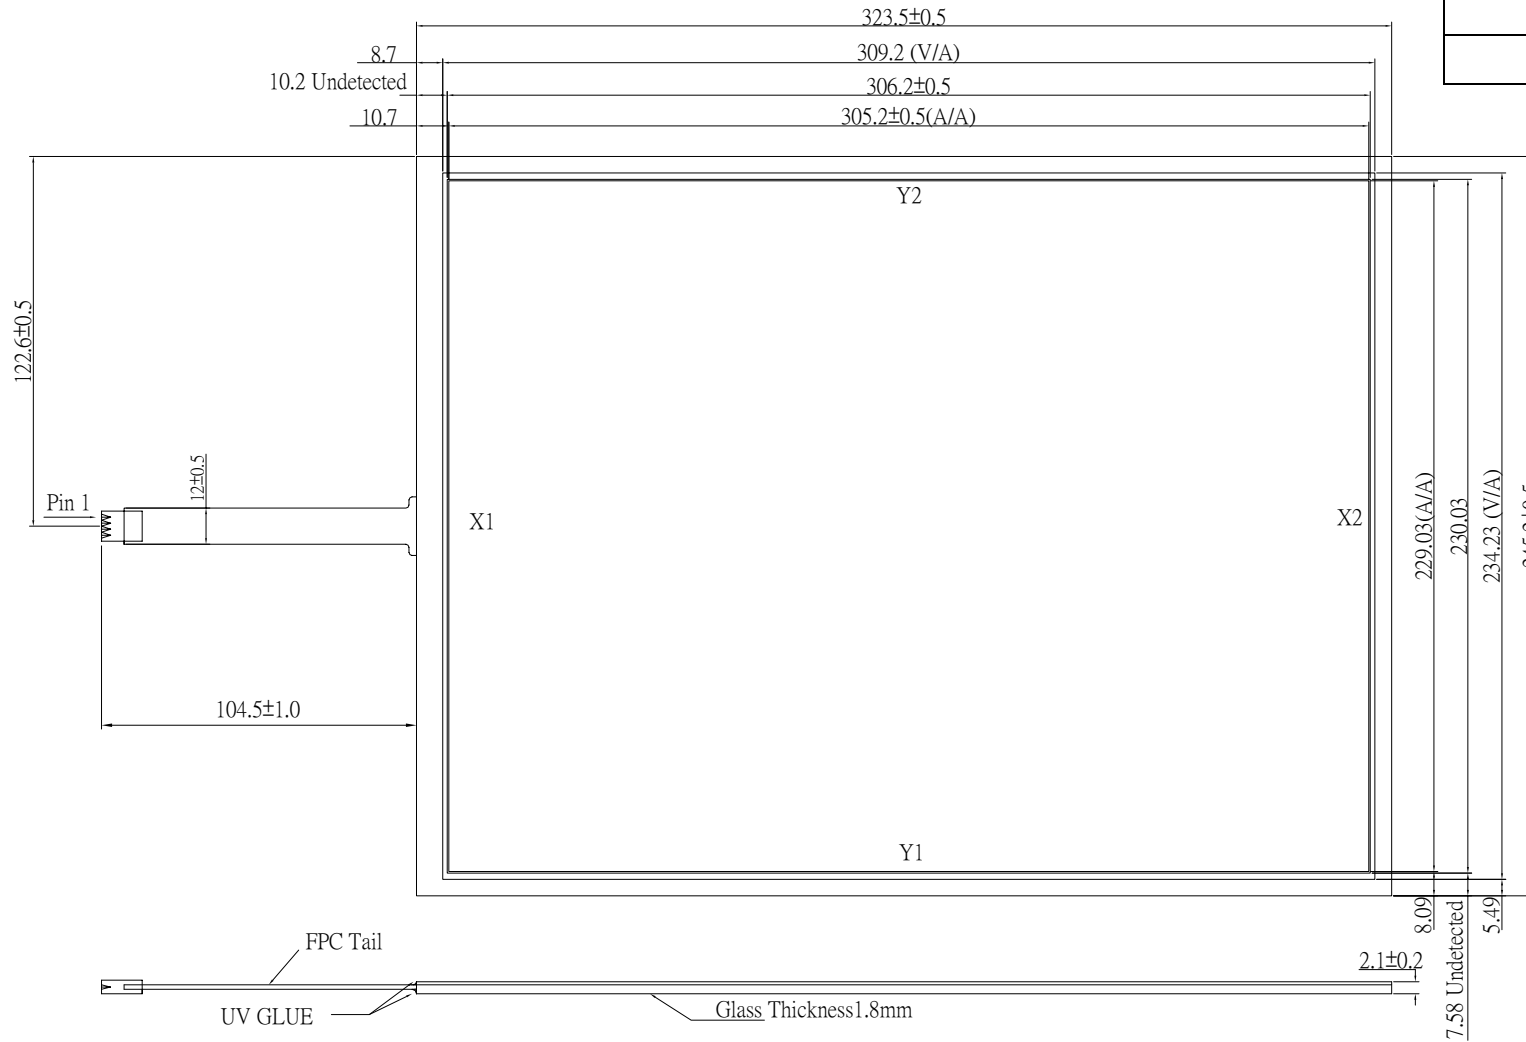

Note:

Pin 1:Right (X2)

Pin 2: Top (Y2)

Pin 3: Left (X1)

Pin 4:Bottom (Y1)

Pin Pitch:2.54mm

Glass:1.8mm

Total Thickness:2.1±0.2 mm

V/A : VIEW AREA

A/A. : ACTIVE AREA

Model	SE-AC323245	Draw	Jason	良英股份有限公司 SUPER ELITE TECHNOLOGY CO., LTD	Unit : mm	DATE	09 - 25 - 2009
		check	Cheng		Tolerance: ±0.5mm		

## Touch Panel Specification

SET

Page

2/2

### 1. Suitability

This specification suit analog resistance touch panel. which used in LCD module.

### 2. Apply To Specification

2.1.Surface Hardness : 3H

2.2. Optical Clarity :  $80 \pm 2 \%$

2.3 Operating Temperature :  $-10^{\circ}\text{C} \sim 60^{\circ}\text{C}$

2.4 Storage Temperature :  $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$

2.5 Operating Voltage : DC5V

2.6 Operating Current : 5mA ~ 25mA

2.7 Isolation Resistance :  $20\text{M}\Omega \uparrow @\text{DC}25\text{V}$

2.8 Linearity :  $\pm 1.5\% \downarrow$

2.9 Operation Pressure : 150g  $\downarrow$

2.10Resistance :  $200\Omega \sim 900\Omega$

2.12 Faceplate Surface : Anti-glare coating