


DWG No. 2K392401DV1

Unit : mm

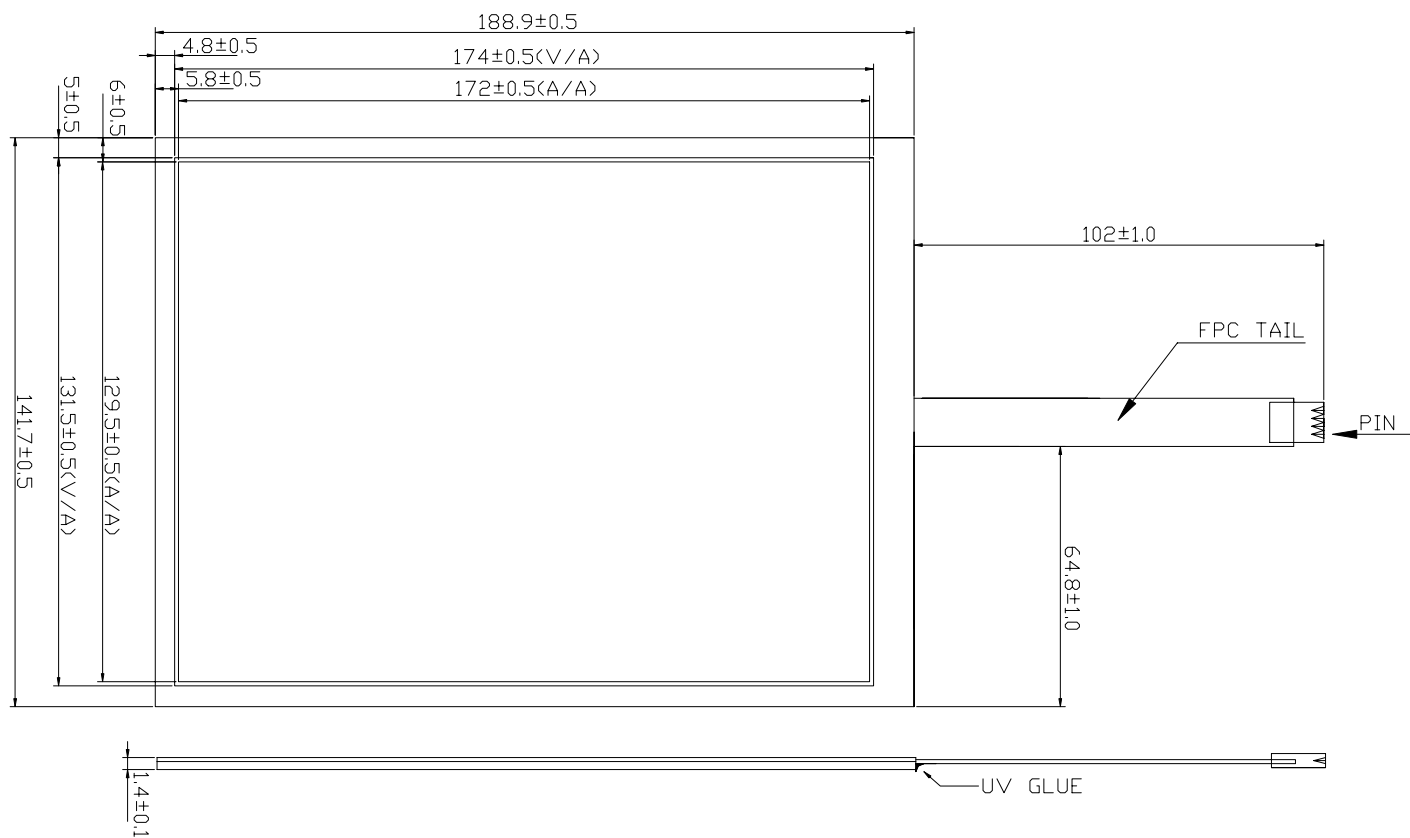

Note :

- V/A : VIEW AERA
- A/A : ACTIVE AERA
- Pin 4 : Right
- Pin 3 : Left
- Pin 2 : Top
- Pin 1 : Bottom
- Pin Pitch : 2.54 mm
- Total Thickness : 1.4 ± 0.1 mm
- Surface Hardness : 3H
- Optical Clarity : 80%
- Operating Temperature : $-10^{\circ}\text{C} \sim 60^{\circ}\text{C}$
- Operating Voltage : DC 5 V
- Resistance : $200 \Omega \sim 900 \Omega$
- Linearity : $<1.5\%$
- Faceplate Surface : Anti-glare coating
- Operation Pressure : 35g~60g
- Storage Temperature : $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
- Isolation Resistance : DC25V 20M Ω

Model	SE-AN0804	Draw	Jason	良英股份有限公司 SUPER ELITE TECHNOLOGY CO., LTD	Unit : mm	DATE	09 - 24 - 2003
		check	Cheng			cheng	