


DWG No. 2K1032201DV0

Version	Revise content	Check

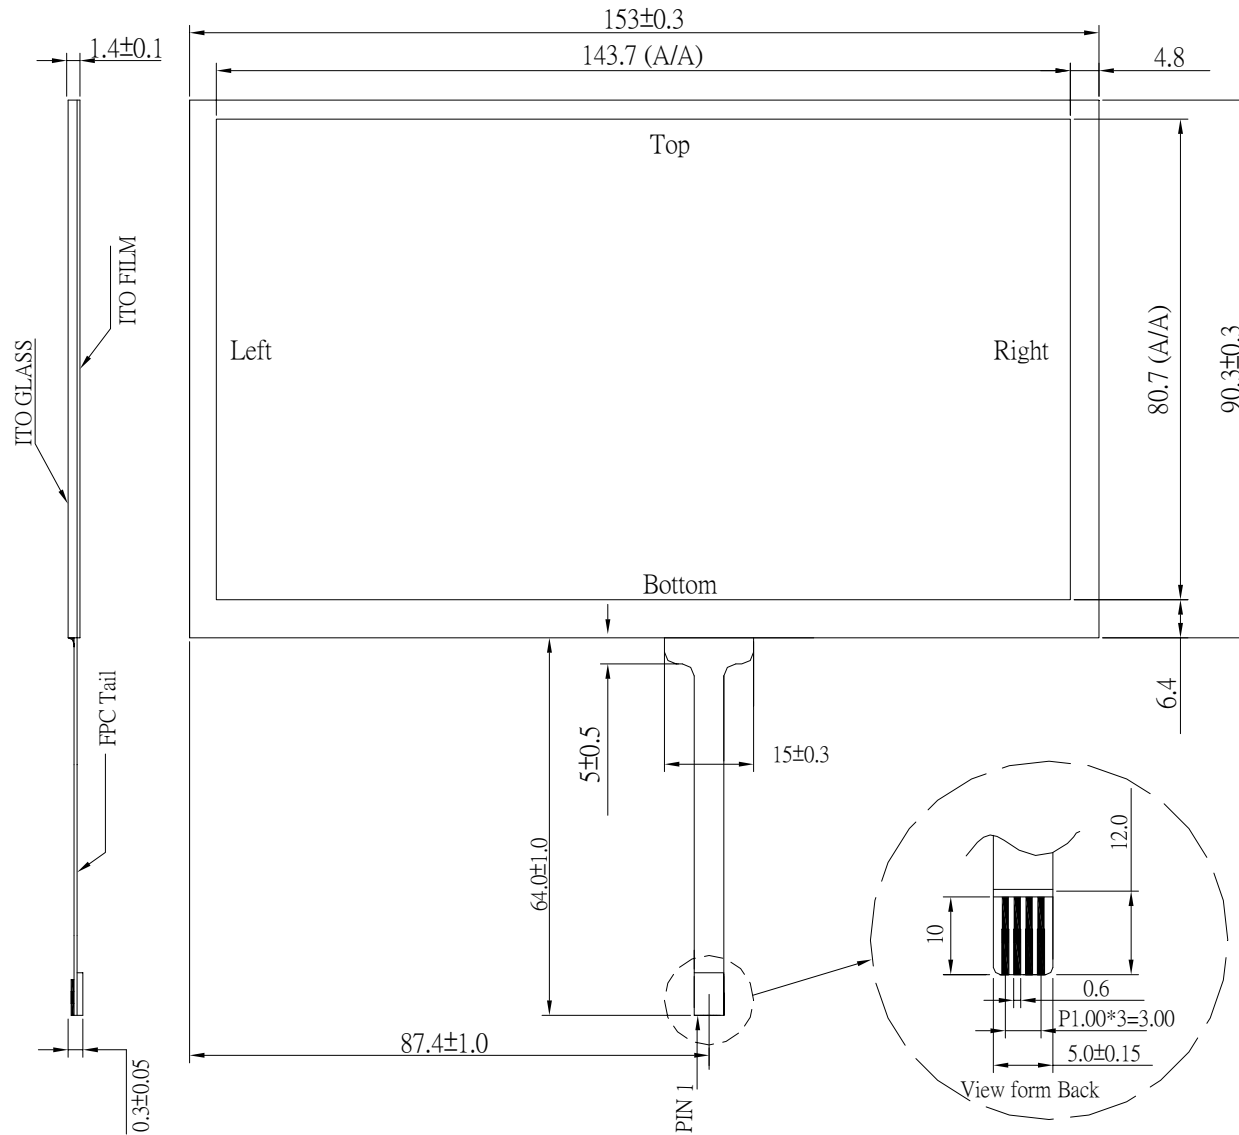

Note :

Pin 1 : Left

Pin 2 : Bottom

Pin 3 : Right

Pin 4 : Top

Pin Pitch : 1.0 mm

ITO Glass : 1.1 mm

Total Thickness : 1.4 ± 0.1 mm

Faceplate Surface : Anti-glare coating

A/A Inside Active

A/A Outside Non-Active

Model No	SE-065A1-4PS	Draw	Jason	良英股份有限公司 SUPER ELITE TECHNOLOGY CO., LTD	Unit: mm Tolerance ± 0.5 mm	Date	03-22-2010
		check	Cheng			revise date	

Automobile Touch Panel Specification

SET

Page

2

1. Suitability

This specification suit analog resistance touch panel. which used in LCD module.

2. Apply To Specification

2.1.Surface Hardness : 3H

2.2. Optical Clarity : 80 ±2%

2.3 Operating Temperature : -40°C ~ 90°C

2.4 Thermal shock test : -40°C ~ 110°C

2.5 Storage Temperature : -40°C ~ 90°C

2.6 Operating Voltage : DC5V

2.7 Operating Current : 5mA ~ 20mA

2.8 Isolation Resistance : 20MΩ ↑ @DC25V

2.9 Linearity : ±1.5% ↓

2.10 Operation Pressure : 100g ↓