


DWG No. 2K1032902DV0

Version	Revise content	Check

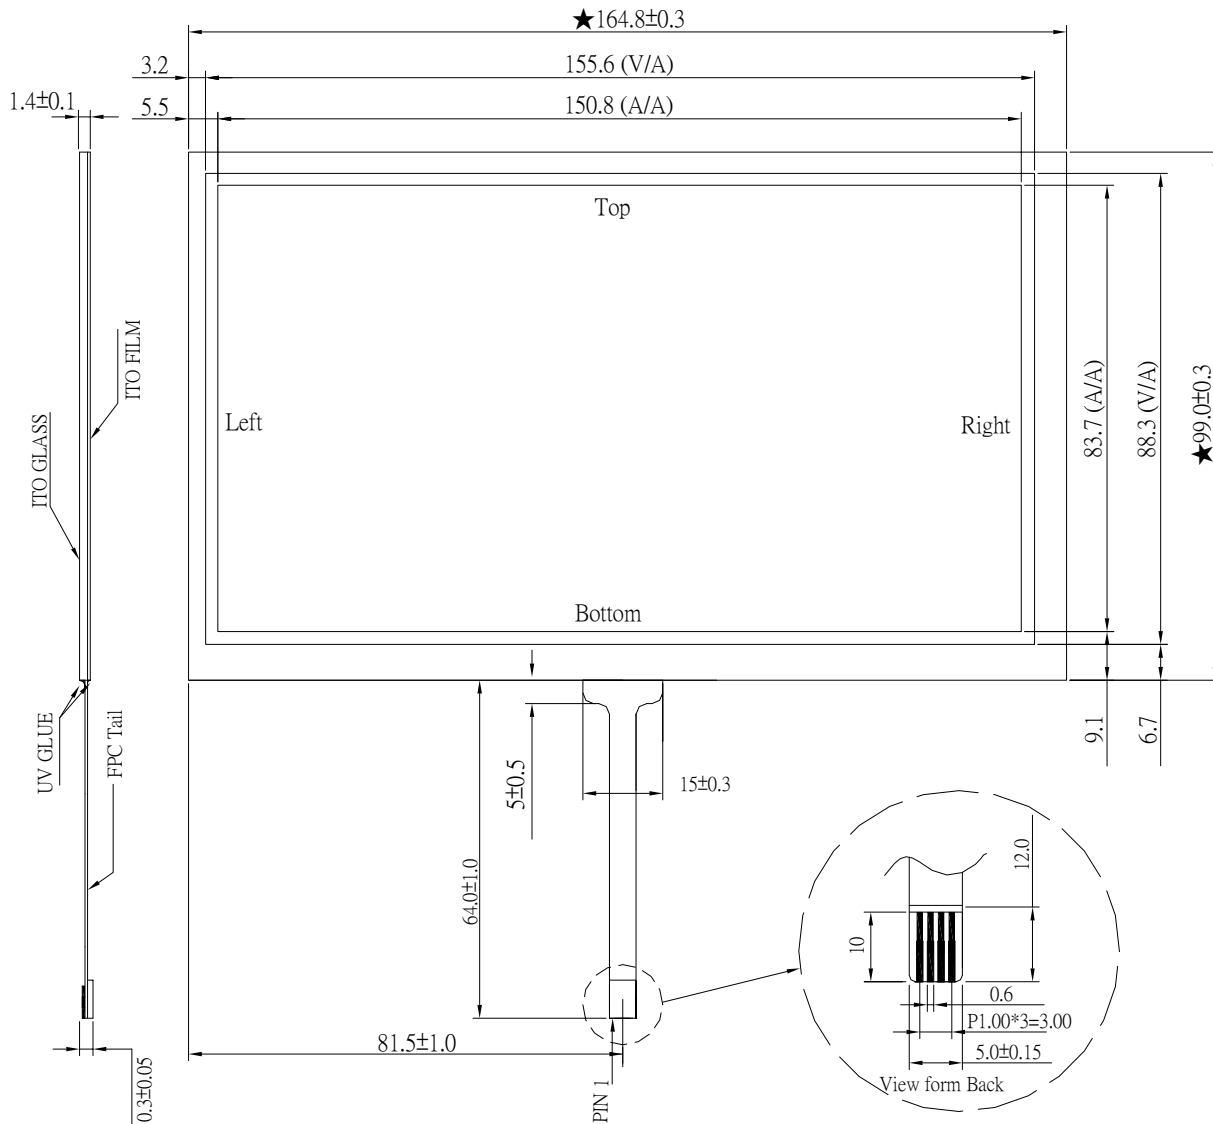

Note :

Pin 1 : Left

Pin 2 : Bottom

Pin 3 : Right

Pin 4 : Top

Pin Pitch : 1.0 mm

ITO Glass : 1.1 mm

Total Thickness : 1.4 ± 0.1 mm

Faceplate Surface : Anti-glare coating

V/A : VIEW AREA

A/A : ACTIVE AREA



Model No	SE-068A1-4PX	Draw	Jason	良英股份有限公司 SUPER ELITE TECHNOLOGY CO., LTD	Unit: mm Tolerance ± 0.5 mm	Date	03-29-2010
		check	Cheng			revise date	

Touch Panel Specification

SET

Page

2/2

1. Suitability

This specification suit analog resistance touch panel. which used in LCD module.

2. Apply To Specification

2.1.Surface Hardness : 3H ↑

2.2. Optical Clarity : 80 ± 3 %

2.3 Operating Temperature : -40°C ~ 90°C

2.4 Thermal shock test : -40°C ~ 110°C

2.5 Storage Temperature : -40°C ~ 90°C

2.6 Operating Voltage : DC5V

2.7 Isolation Resistance : 20MΩ ↑ @DC25V

2.8 Linearity : ±1.5% ↓

2.9 Operation Pressure : 100g ↓

2.10 Faceplate Surface : Anti-glare coating