


DWG No. 2K582201DV1

Version	Revise content	Check
①	1.9mm ->2.1mm	CHENG

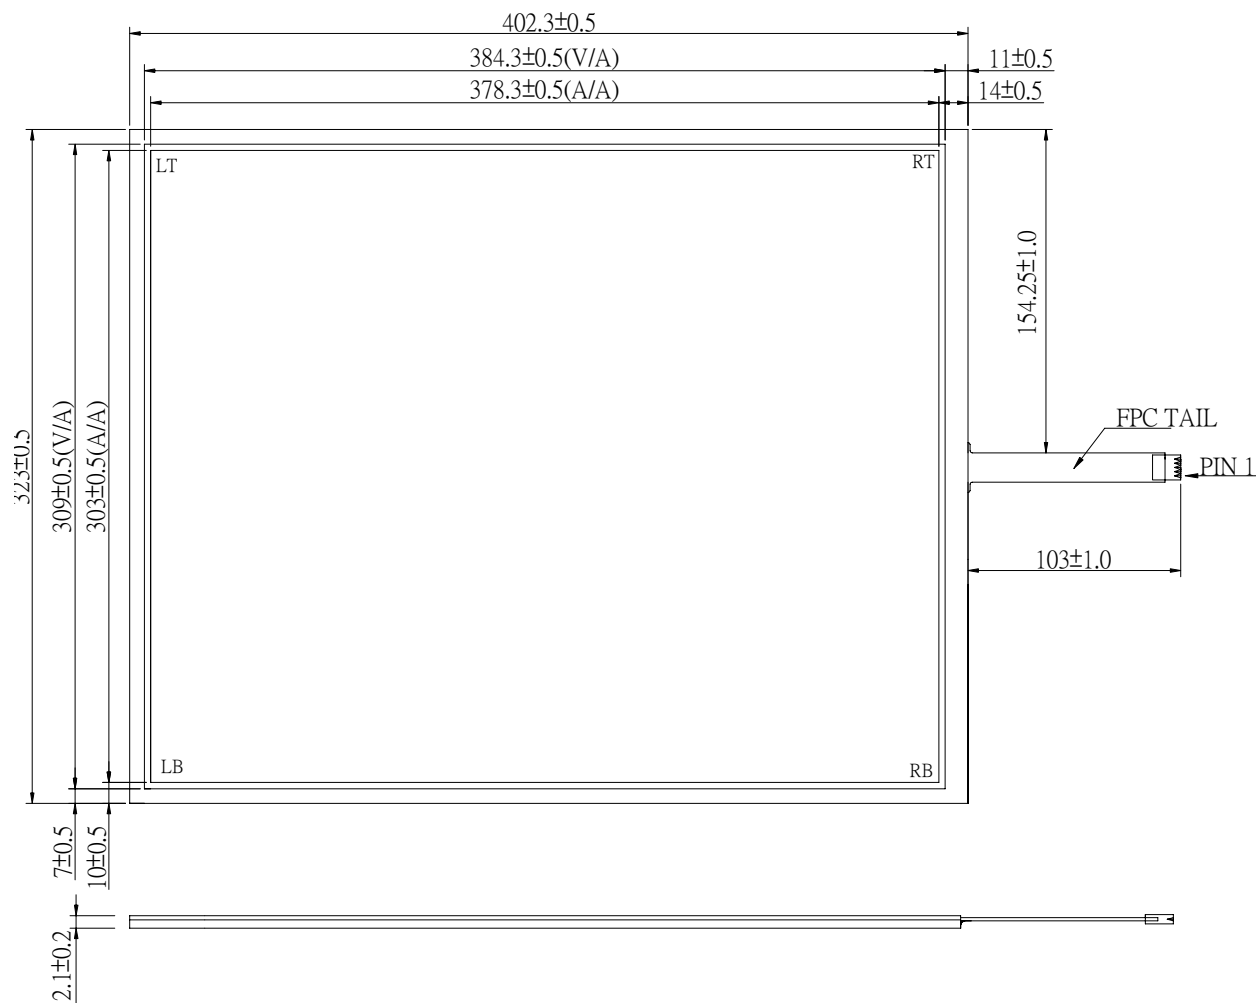

Note :

V/A : VIEW AERA

A/A : ACTIVE AERA

Pin 5 : LT

Pin 4 : RT

Pin 3 : AD-X

Pin 2 : RB

Pin 1 : LB

Pin Pitch : 2.54 mm

ITO Glass : 1.8 mm

Total Thickness : 2.1 ± 0.2 mm

V/A : VIEW AREA

A/A : ACTIVE AREA

Model	SE-5W1911	Draw	JASON	良英股份有限公司 SUPER ELITE TECHNOLOGY CO., LTD	Unit : mm	DATE	08 - 22 - 2005
		check	CHENG			cheng	06 - 24 - 2009

# Touch Panel Specification

SET

Page

2/2

## 1. Suitability

This specification suit analog resistance touch panel. which used in CRT module.

## 2. Apply To Specification

2.1.Surface Hardness : 3H ↑

2.2. Optical Clarity : 78 ~ 82 %

2.3 Operating Temperature : -10°C ~ 60°C

2.4 Storage Temperature : -20°C ~ 70°C

2.5 Operating Voltage : DC5V

2.6 Faceplate Surface : Anti-glare coating

2.7 Isolation Resistance : 20MΩ ↑ @DC25V

2.8 Linearity : ±1.5% ↓

2.9 Operation Pressure : 100g ↓

2.10 Resistance : 20Ω ~ 100Ω